Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Click Here for [HOME PAGE]

CNX C E 2 1 XX

Jameco Part Number 143036

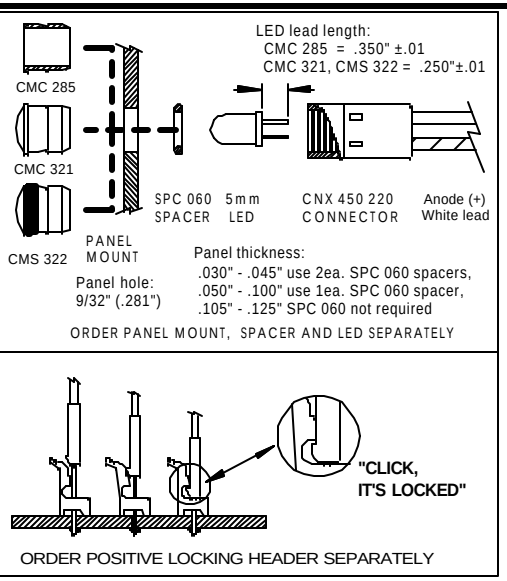
LED lead length:
CMC 285 = .350" ±.01
CMC 321, CMS 322 = .250"±.01
CMC 285
CMC 321
CMS 322
PANEL MOUNT
SPC 060 SPACER
5mm LED
CNX 450 220 CONNECTOR
Anode (+) White lead
Panel hole: 9/32" (.281")
Panel thickness:
.030" - .045" use 2ea. SPC 060 spacers,
.050" - .100" use 1ea. SPC 060 spacer,
.105" - .125" SPC 060 not required
ORDER PANEL MOUNT, SPACER AND LED SEPARATELY
"CLICK, IT'S LOCKED"
ORDER POSITIVE LOCKING HEADER SEPARATELY

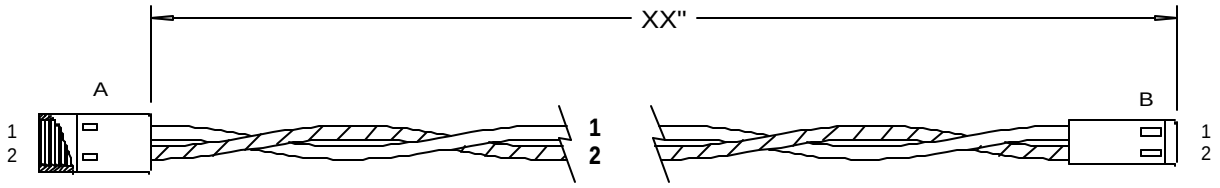

Customer Name: _____

Address: _____

_____

Customer Contact: _____

Phone: _____ **Fax:** _____

Customer approval: _____

Date of approval : _____

NOTES:

1) Material: U.L. Rating - "Thermoplastic material used on a secondary circuit"
2) Wire: 22 awg (105° C) color Black / White
3) Panel Mounting: CMC 321 or CMS 322 lense - panel hole size .281"
   PCB Mounting: VCC Pin Header, positive locking series or equal

CABLE ASSEMBLY BILL OF MATERIALS

ITEM	P/N	DESCRIPTION	COLOR	LENGTHS
A	450220	5MM CONNECTOR		STANDARD
B	450302	2 POSITION LOCKING HEADER CONNECTOR		4 INCH 6 INCH 8 INCH 10 INCH 12 INCH 18 INCH 24 INCH OPTIONAL LENGTHS AVAILABLE
1	WIRE	22 AWG 1007 / 1569	WHITE	
2	WIRE	22 AWG 1007 / 1569	BLACK	

U.S. / FOREIGN PAT. ISSUED & PEND.

REVISIONS			
NO	DESCRIPTION	DATE	BY
1			
2			
3			
4			
5			

VCC P/N: CNX C E 2 1 XX

VCC **VISUAL COMMUNICATIONS COMPANY, INC.**
7920-F Arjons Drive San Diego, California 92126 U.S.A.
Phone (858) 549-6900 Fax (858) 549-3520 e-mail vccsales@vcclite.com

TOLERANCES	SCALE N/A	DATE 03/04/99	DRAWING NO.
DECIMAL ±.500	DIAMETER	DRAWN BY JMS	
ANGLE	RADII	CHK'D	